

Thermal Spray Cooling Technology Flexible solution. Proven results.



The nozzle for Air Products thermal spray cooling technology can be either statically mounted, or mounted onto the spray guns robotic arm. During your spray application, the cryogenic vapour jet follows the spray plume to maintain the part's temperature within the specified range, with the advanced system.


"A desire to respect the environment, and make savings on production time and costs are the reasons behind our collaboration with Air Products on Thermal Spray Cooling."

Director General, Metrasur
(Key partner to the aerospace industry)

Air Products has drawn upon its 50+ years' experience in gas application technologies to develop solutions to help you succeed.

A key challenge in thermal spray applications is the need to keep parts within a tightly set temperature range; failure to do so can result in off-spec products as a result of over heating or over cooling. This will impact upon coating adhesion, substrate and coating hardness, fatigue life, corrosion resistance and dimensional tolerances.

Part temperature is traditionally maintained using forced air cooling – combined with inter-pass breaks – allowing parts to cool before the next layer is applied, or by spraying with carbon dioxide. Either method, however, can lead to reduced productivity, wasted feed powder and process gases or, in the case of cooling with carbon dioxide, the formation of micro cracks. Today, many of these common problems, including the the need for cooling breaks are easily overcome thanks to Air Products' thermal spray cooling technology's highly efficient temperature control system.

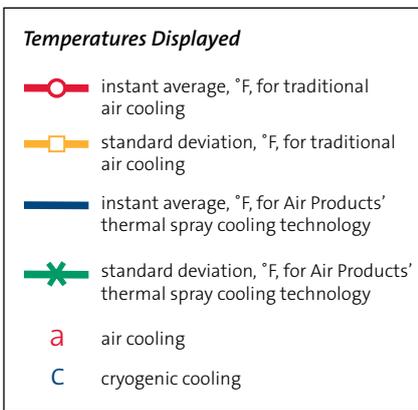

Patented technology

Air Products' thermal spray cooling technology uses cryogenic nitrogen vapor and in-flight evaporating nitrogen aerosol spray (-195°C) for high quality thermal sprayed coatings – including tungsten carbide cobalt – faster and at a lower cost than with traditional cooling methods. Our novel technology can cool your parts twice as fast than you can with shop air alone. Plus, with our advanced system, you can maintain part temperature within a +/- 10°C range during your thermal spray coating application (see Figure 1). The result is lower costs due to the elimination of inter-pass cooling breaks, reduction in powder and gas waste, and better utilisation of the thermal spray equipment and booth.


Options to meet your needs

Advanced Thermal Spray Cooling System

Air Products' advanced thermal spray cooling system takes process control to a new level. The system uses liquid and gaseous nitrogen as the cooling media. The cooling nozzle is either static mounted, or mounted on the robotic arm so it trails behind the spray gun to cool the part during the spraying process. Through the closed-loop temperature feedback system, you can achieve optimal part cooling and maintain the coating temperature within a user-defined temperature range. Our temperature monitoring and control software uses proprietary cooling algorithms to determine the appropriate cooling intensity based on the thermal

Figure 1

Traditional Air Cooling vs. Air Products' Thermal Spray Cooling Technology for Coatings Deposited in 11 Spray Passes

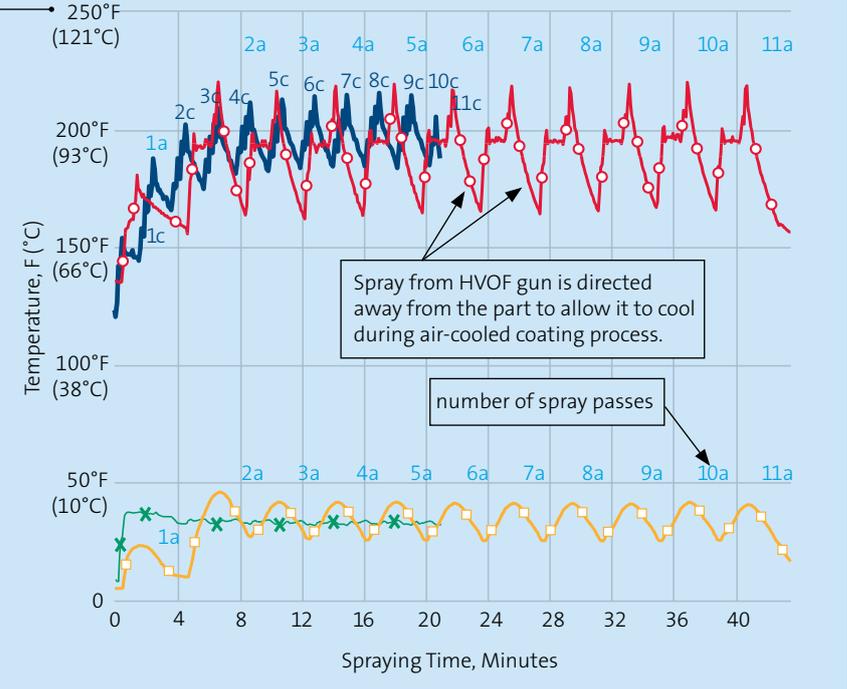

Air Products' novel thermal spray cooling technology delivers exceptional results. This graph shows actual process data for spraying aircraft landing gear with traditional air cooling compared to our nitrogen cryogenic vapor cooling system. With the Air Products thermal spray cooling technology, the part's temperature was maintained within a much tighter range during the spray operation. In addition, it halved the spraying time and the amount of powder and process gases consumed—plus improved productivity.

imaging camera and/or infrared sensor inputs. Plus, multiple cooling lines provide set-up flexibility for parts with complex geometry. The advanced cooling system offers:

- Variable cooling intensity based on actual temperatures and user-defined inputs
- Flexible temperature signal acquisition through infrared sensors and/or a thermal imaging camera
- Real-time temperature display
- Data and image storage
- Data retrieval capabilities for quality control post-inspection
- Unrestricted cooling configuration and operating mode selection (liquid nitrogen, gaseous nitrogen, forced air, and hybrid)

These features provide real-time vital characteristics of the coating process, such as instant and time-averaged temperature of the part, temperature distribution in various

part areas, and standard deviation of accumulated thermal data. This data can be tracked, recorded and stored for audit purposes. Our advanced system provides all the features of our standard system, with the added benefit of added range of control, monitoring and data collection required for your critical spray operations.

Standard Thermal Spray Cooling System

Air Products' standard thermal spray cooling system uses liquid and gaseous nitrogen as the cooling media. The cooling nozzle can be static mounted, or mounted on the robotic arm, trailing the spray gun. The system delivers a predetermined mixture of liquid nitrogen vapor and gaseous nitrogen based on operator input. Your part cooling can be optimised by selecting any of the five user-defined cooling modes, ranging from room temperature nitrogen gas to 100% cryogenic

Table 1**Thermal Spray Cooling System Comparison**

<i>Features</i>	<i>Advanced System</i>	<i>Standard System</i>	<i>Monitoring System</i>
Compatible with existing thermal spray systems	■	■	■
Easily installed on robotic arms for precision cooling	■	■	
Variable cooling modes	■	■	
– Precision spot cooling	■	■	
– Diffuse, wide-area cooling	■	■	
Automatically controlled by preset commands (minimal operator input)	■		
High-efficiency, cost-effective liquid nitrogen usage	■	■	
Options:			
Infrared sensors or 2D thermal imaging system	■		■
Up to 5 additional liquid nitrogen hoses per unit for additional cooling	■	■	
Temperature calibration system	■		
Data management system—ideal for quality assurance purposes	■		■
Numerous, cost-effective nitrogen supply options available worldwide	■	■	

liquid nitrogen. This system provides flexibility in selecting a desired cooling capacity for the part you're spraying, in a less sophisticated control package than our advanced system.

Temperature monitoring of thermal spray process

When liquid nitrogen cooling is not required but temperature monitoring of the spraying process is, Air Products' thermal spray monitoring system is a valuable tool. This system can monitor and record data from measurable inputs during the thermal spray process – especially substrate temperature monitoring. The monitoring system provides temperature signal acquisition through infrared sensors and/or thermal imaging cameras, real-time thermal data display, thermal data and image storage, and data archiving playback for quality control post-inspection. While cooling is not provided with the monitoring system, you can integrate cooling modules at a future date if you want to add that option.

Real Results

Consumable Savings:

Air Products' advanced thermal spray cooling technology allowed a major aircraft maintenance, repair, and overhaul facility to halve the spraying time, the amount of powder and process gases consumed in the coating of its aircraft landing gear. They used high-velocity oxy-fuel (HVOF) to apply tungsten carbide cobalt chrome (WC-CoCr).

The cryogenic vapor cooling system reduced the thermal gradients that are normally created during the conventional spray operation. Based on microstructural and compositional analysis, microporosity, bond strength, hardness, and as-sprayed roughness measurements, the quality of the cryogenically vapor-cooled WC-CoCr coatings was as good as or better than the quality of the air-cooled coatings.

Setup Savings:

Our system can eliminate the need for traditional, rigid protective masking that must be rugged and resistant to high temperatures. With our technology, you can use inexpensive, flexible masking tapes that are easy to apply and remove, resulting in radically reduced setup and cleaning times. This is a result of cryogenic nitrogen's unique ability to cool the masking tape quickly, preventing its thermal breakdown.



With the advanced thermal spray cooling technology system you can monitor your spray operation from the control room. The temperature profile for your operation will be displayed on your computer screen and captured for future analysis, playback and audits.

For more information:

To learn more about our cooling technology and how it can help your thermal spray application, contact your local Air Products office:

Belgique/België

Air Products NV/SA
T 02 255 28 95
E beinfo@airproducts.com
airproducts.be
airproducts.be/fr

Česká Republika

AIR PRODUCTS spol. s r.o.
T 800 100 700
E infocz@airproducts.com
airproducts.cz

Deutschland

Air Products GmbH
T +49 (0) 234 6105 6300
F +49 (0) 234 6105 6371
E apginfo@airproducts.com
airproducts.de

España

Carbueros Metálicos, S.A.
T 902 13 02 02
E oferta@carbueros.com
carbueros.com

France

Air Products SAS
T 0800 480 030
E frinfo@airproducts.com
airproducts.fr

Nederland

Air Products Nederland BV
T 020-435 3535
E nlinfo@airproducts.com
airproducts.nl

Polska

Air Products Sp. z o.o.
T 0 801 08 11 22
E infopl@airproducts.com
airproducts.com.pl

Portugal

GASIN Gases Industriais, S.A.
T 229 998 300
E proposta@gasin.com
gasin.com

Slovenská Republika

Air Products Slovakia, s.r.o.
T 0800 100 700
E infosk@airproducts.com
airproducts.sk

United Kingdom

Air Products PLC
T 0800 389 0202
E apukinfo@airproducts.co.uk
airproducts.co.uk



tell me more
airproducts.com/spray